


SUBMITTAL DATA SHEET

21000 Series
 4" No-Lead Brass Submersible Pumps
V - 7 GPM



A.Y. McDonald offers a full line of no-lead brass submersible pumps built for years of trouble free operation, with high-efficiency impellers and diffusers. These submersibles offer peak capacity performance in 5, 7, 10, 15, 20, and 25 gallons per minute (GPM). Other features include no-lead discharge head with a built-in check valve, and stainless steel shaft and coupling.

All No-Lead Pumps come with a 1 1/4" discharge and sizes range from 1/3 to 2 horsepower (HP). Two wire models up to 1 1/2 horsepower (HP) or three wire models up to 2 horsepower (HP).

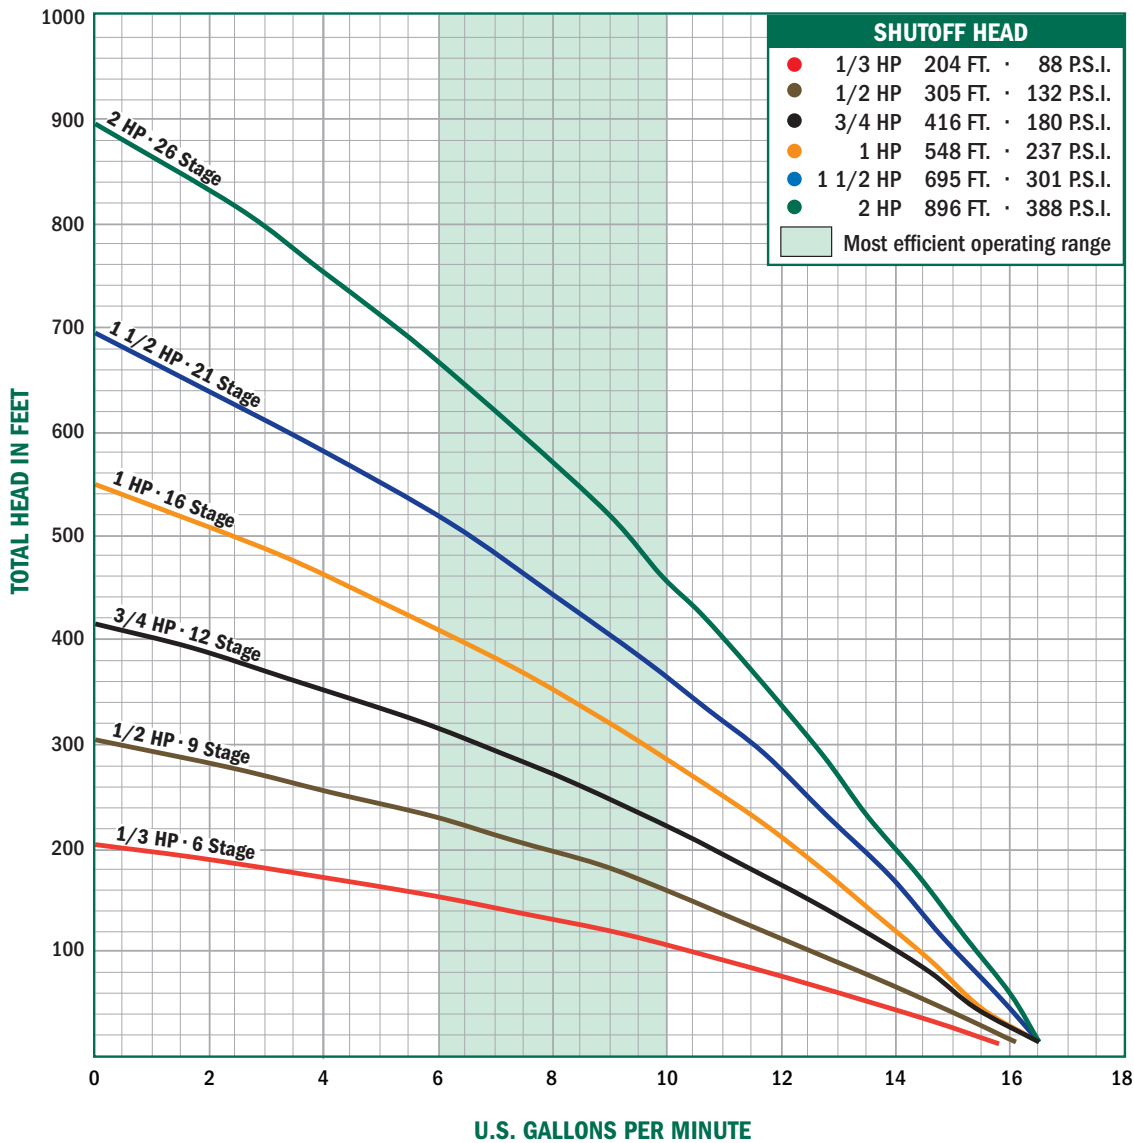

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
 4800 Chavenelle Rd
 Dubuque, IA 52002

Toll Free: 1-800-292-2737
 sales@aymcdonald.com
 aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by:

SUBMITTAL DATA SHEET

21000 Series 4" No-Lead Brass Submersible Pumps V - 7 GPM



Two Wire Single Phase


Part No.	Model No.	HP	Stages	Volt	A	B	WT.
6633-001	21030V2A*	1/3	6	115	11.1"	13.4"	26
6633-002	21030V2*	1/3	6	230	11.1"	13.4"	27
6633-008	21050V2A	1/2	9	115	13.5"	13.4"	28
6633-009	21050V2	1/2	9	230	13.5"	13.0"	30
6633-014	21075V2	3/4	12	230	15.9"	13.8"	30
6633-019	21100V2	1	16	230	19.1"	16.8"	41
6633-023	21150V2	1 1/2	21	230	23.6"	18.5"	49

Three Wire** Single Phase

Model No.	Model No.	HP	Stages	Volt	A	B	WT.
6633-003	21030V3A*	1/3	6	115	11.1"	9.5"	28
6633-005	21030V3*	1/3	6	230	11.1"	9.5"	28
6633-010	21050V3A	1/2	9	115	13.5"	9.5"	31
6633-012	21050V3	1/2	9	230	13.5"	10.5"	31
6633-015	21075V3	3/4	12	230	15.9"	11.3"	37
6633-020	21100V3	1	16	230	19.1"	13.6"	40
6633-024	21150V3	1 1/2	21	230	23.6"	16.2"	50
6633-027	21200V3	2	26	230	28.3"	16.2"	54

4" No-Lead Brass Pump Ends

Part No.	Model No.	HP	WT.
6633-000	21030V	1/3	9
6633-007	21050V	1/2	10
6633-017	21075V	3/4	13
6633-018	21100V	1	11
6633-022	21150V	1 1/2	16
6633-026	21200V	2	18

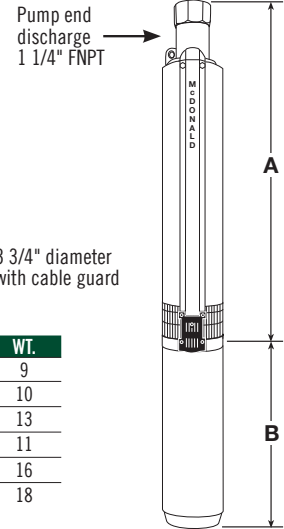

* All one-third horsepower pumps are furnished with one-half horsepower motors (and control boxes where applicable).

** All three wire pumps are available in three phase by selecting pump end and appropriate motor and starter kit.

Output - in Gallons Per Minute (Depth to Water)

HP	PSI	1/3 HP							PSI	1/2 HP										
		25'	50'	75'	100'	125'	150'	175'		25'	50'	75'	100'	125'	150'	175'	200'	225'	250'	275'
1/3	0	15.1	13.7	12.2	10.5	8.6	6.4	3.8	0	15.6	14.6	13.6	12.6	11.5	10.4	9.2	7.8	6.3	4.5	2.5
	30	10.9	9.0	6.9	4.4	1.3			30	12.8	11.8	10.7	9.5	8.2	6.7	5.0	3.0			
	40	9.2	7.1	4.6	1.6				40	11.9	10.8	9.6	8.3	6.8	5.1	3.1				
	50	7.2	4.8	1.9					50	10.9	9.7	8.4	6.9	5.2	3.3					
3/4	0	16.1	15.5	14.8	14.0	13.3	12.5	11.6	10.8	9.9	8.9	7.8	6.7	5.5	4.2	2.8				
	30	14.2	13.4	12.7	11.8	11.0	10.1	9.1	8.1	7.0	5.8	4.5	3.1	1.5						
	40	13.5	12.7	11.9	11.0	10.1	9.2	8.2	7.1	5.9	4.6	3.2	1.7							
	50	12.8	12.0	11.1	10.2	9.3	8.2	7.2	6.0	4.7	3.3	1.8								
60	12.0	11.2	10.3	9.3	8.3	7.2	6.1	4.8	3.4	1.9										
1	0	16.1	15.5	15.0	14.4	13.9	13.3	12.8	12.2	11.6	11.0	10.3	9.6	8.9	8.1	7.2	6.3	5.4	4.5	3.5
	30	14.5	14.0	13.5	12.9	12.3	11.8	11.1	10.5	9.8	9.1	8.3	7.4	6.6	5.6	4.7	3.7	2.7		
	40	14.0	13.5	12.9	12.4	11.8	11.2	10.5	9.9	9.1	8.3	7.5	6.6	5.7	4.7	3.8	2.8			
	50	13.5	13.0	12.4	11.8	11.2	10.6	9.9	9.2	8.4	7.6	6.7	5.8	4.8	3.8	2.8				
60	13.0	12.5	11.9	11.3	10.6	10.0	9.2	8.5	7.6	6.8	5.8	4.9	3.9	2.9	1.9					
1 1/2	0	15.9	15.1	14.3	13.4	12.4	11.4	10.4	9.2	7.9	6.5	5.0	3.4	1.6						
	30	14.8	13.9	13.0	12.1	11.0	9.9	8.7	7.4	5.9	4.4	2.7								
	40	14.4	13.5	12.6	11.6	10.5	9.4	8.1	6.7	5.2	3.6	1.9								
	50	14.0	13.1	12.1	11.1	10.0	8.8	7.5	6.0	4.5	2.8									
60	13.6	12.7	11.7	10.6	9.5	8.2	6.8	5.3	3.7	2.0										
2	0	16.1	15.4	14.7	14.0	13.3	12.6	11.8	11.0	10.2	9.3	8.4	7.4	6.4	5.3	4.1	2.9	1.5		
	30	15.1	14.5	13.8	13.0	12.3	11.5	10.7	9.8	8.9	8.0	7.0	6.0	4.9	3.7	2.3				
	40	14.8	14.1	13.4	12.7	11.9	11.1	10.3	9.4	8.5	7.6	6.5	5.5	4.3	3.1	1.7				
	50	14.5	13.8	13.1	12.3	11.5	10.7	9.9	9.0	8.1	7.1	6.1	4.9	3.8	2.4					
60	14.2	13.5	12.7	12.0	11.2	10.3	9.5	8.6	7.6	6.6	5.6	4.4	3.2	1.8						

FRICITION LOSSES IN RISER PIPE
HAVE NOT BEEN CALCULATED

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
4800 Chavenelle Rd
Dubuque, IA 52002

Toll Free: 1-800-292-2737
sales@aymcdonald.com
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: