


SUBMITTAL DATA SHEET

24000 Series High Flow
4" No-Lead Stainless Steel Submersible Pumps

G - 40 GPM



All Stainless Steel Submersible Pumps are designed to pump within the 40 gallons per minute (GPM) range. Sizes are available from 1 1/2 to 7 1/2 HP. All models are standard with 2" NPT discharge.

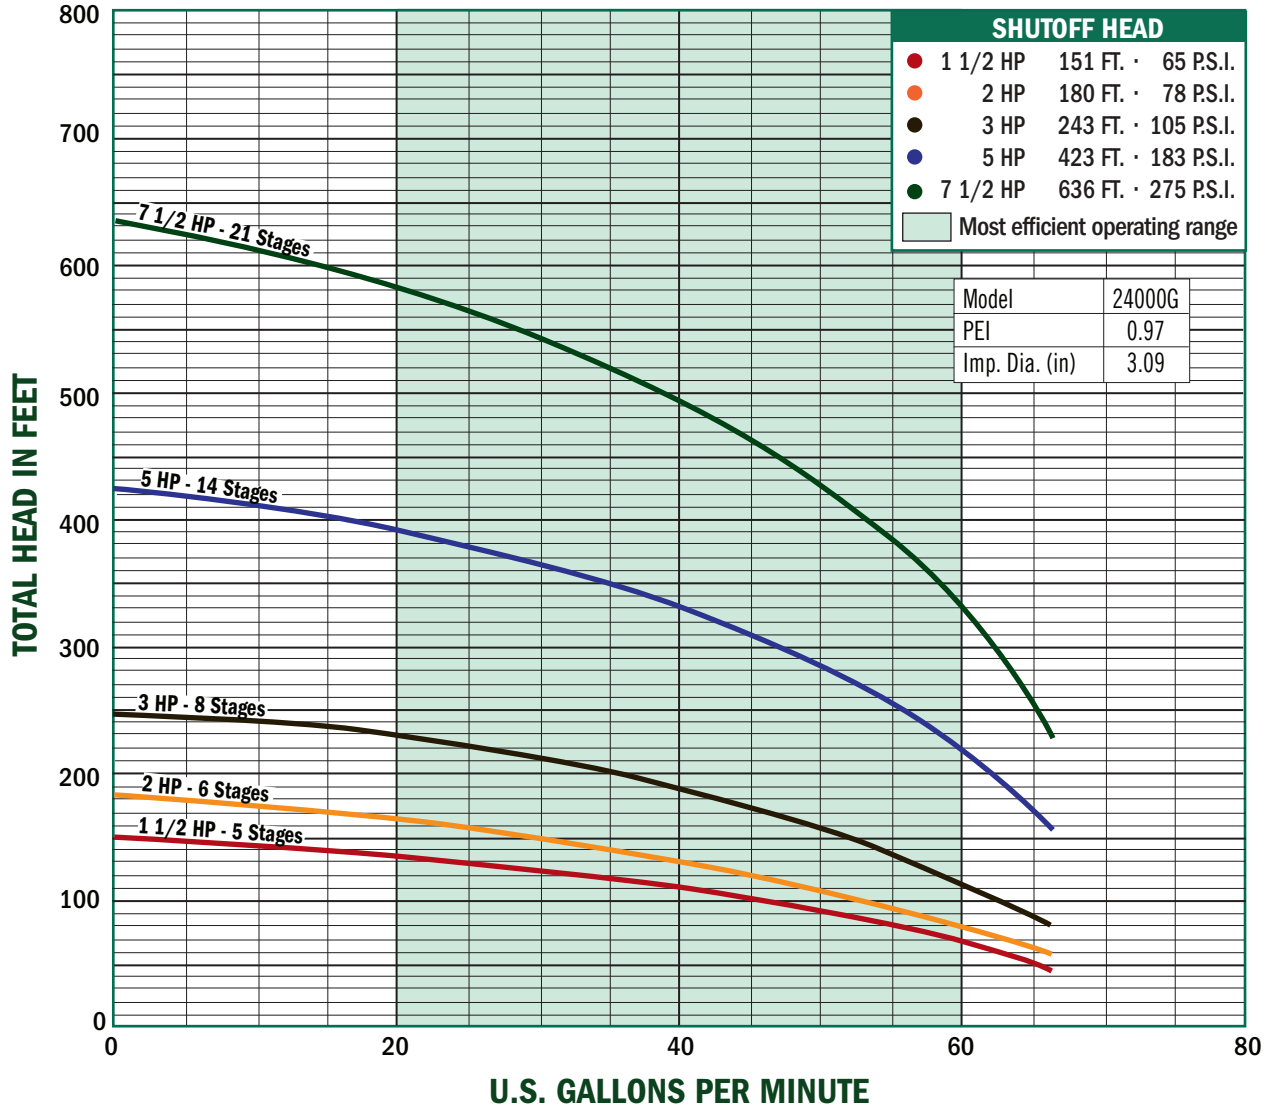

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
4800 Chavenelle Rd
Dubuque, IA 52002

Toll Free: 1-800-292-2737
sales@aymcdonald.com
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by:

SUBMITTAL DATA SHEET

24000 Series High Flow 4" No-Lead Stainless Steel Submersible Pumps G - 40 GPM



Two Wire Single Phase

Part No.	Model No.	HP	Stages	Volt	A	B	Wt.
6630-094	24150G2	1 1/2	5	230	12.8"	18.5"	37

Three Wire Single Phase

Part No.	Model No.	HP	Stages	Volt	A	B	Wt.
6630-095	24150G3	1 1/2	5	230	12.8"	16.2"	48
6630-102	24200G3	2	6	230	14.0"	16.2"	51
6630-109	24300G3	3	8	230	16.5"	21.4"	73
6630-116	24500G3	5	14	230	23.8"	26.9"	99


Three Wire Three Phase

Part No.	Model No.	HP	Stages	Volt	A	B	Wt.
6630-099	24150G3Z	1 1/2	5	230	12.8"	13.6"	47
6630-097	24150G3Y	1 1/2	5	460	12.8"	13.6"	40
6630-106	24200G3Z	2	6	230	14.0"	15.4"	47
6630-104	24200G3Y	2	6	460	14.0"	15.4"	46
6630-113	24300G3Z	3	8	230	16.5"	19.8"	60
6630-111	24300G3Y	3	8	460	16.5"	19.8"	51
6630-120	24500G3Z	5	14	230	23.8"	24.2"	75
6630-118	24500G3Y	5	14	460	23.8"	24.2"	71
6630-125	24750G3Z	7 1/2	21	230	33.8"	26.9"	93
6630-123	24750G3Y	7 1/2	21	460	33.8"	26.9"	93

4" Stainless Steel Pump Ends

Part No.	Model No.	HP	Wt.
6630-093	24150G	1 1/2	7
6630-101	24200G	2	8
6630-108	24300G	3	9
6630-115	24500G	5	13
6630-122	24750G	7 1/2	18

** All three wire pumps are available in three phase by selecting pump end and appropriate motor and starter kit.

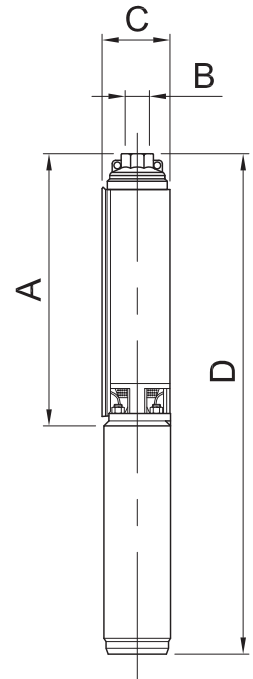

Output - in Gallons Per Minute (Depth to Water)

1 1/2 HP	PSI	20'	30'	40'	50'	60'	70'	80'	90'	100'	120'	140'
	0				65	63	57	54	50	45	32	15
	30			40	31	22	12					
	50	17	12									

2 HP	PSI	20'	30'	40'	50'	60'	70'	80'	90'	100'	120'	140'	160'
	0					66	63	58	56	53	43	34	22
	30	55	52.5	47.5	44	38	34	28	22	12			
	50	37.5	32	27	17.5	12							

3 HP	PSI	20'	30'	40'	50'	60'	70'	80'	90'	100'	120'	140'	160'	180'	200'	240'
	0								66	64	62.5	57	53	43	35	10
	30	66	62.5	60	58	57	55	53	43	42	38	31	20	5		
	50	55	52.5	50	47.5	44	41	38	33	27	20					

5 HP	PSI	100'	120'	160'	180'	200'	220'	240'	260'	280'	300'	320'	340'	360'	380'	400'
	0					63	58	56	53	50	46	42	37	32	23	16
	30			57	56	52	48	44	40	34	27	18				
	50	60	57	51	47	43	38	33	26	22						

7 1/2 HP	PSI	220'	240'	260'	280'	300'	320'	340'	360'	380'	400'	420'	440'	460'	500'	540'
	0					63	61	58	57	55	53	51	48	45	38	30
	30			59	58	57	53	52	48	46	43	40	37	32	22	
	50	61	57	56	53	52	48	44	42	38	35	31	23			

FRICITION LOSSES IN RISER PIPE HAVE NOT BEEN CALCULATED

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
4800 Chavenelle Rd
Dubuque, IA 52002

Toll Free: 1-800-292-2737
sales@aymcdonald.com
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: