



SUBMITTAL DATA SHEET

Stainless-Steel Ball Valves Full Port Ball Valves - 2032SST

FNPT x FNPT Thread

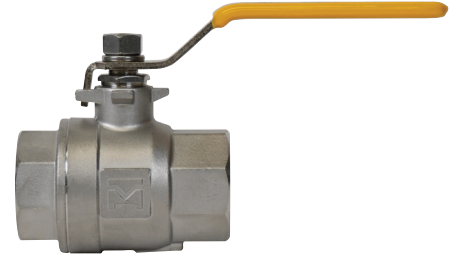

A.Y. McDonald Mfg. Co. Stainless-Steel Ball Valves are constructed of heavy duty stainless-steel and can be used with a full range of liquids and gases in commercial, industrial and residential applications. Full Port Ball Valves allow for maximum flow with minimum pressure drop.

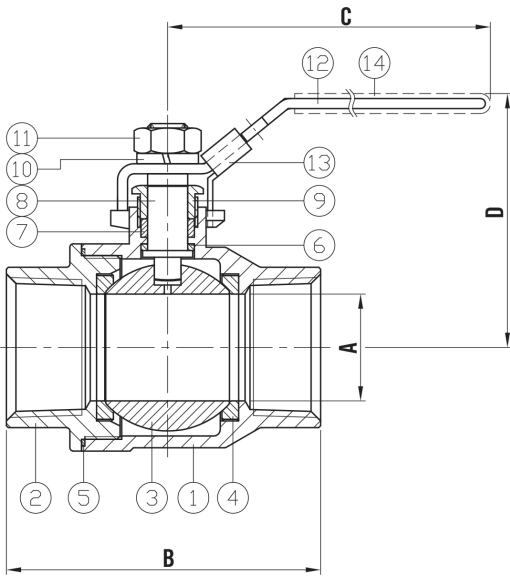


Materials

No.	Part	Material
1	Body	316 Stainless-Steel***
2	Cap	316 Stainless-Steel***
3	Ball	316 Stainless-Steel***
4	Seat	PTFE
5	Seal	PTFE
6	Thrust Washer	PTFE
7	Packing	PTFE
8	Stem	316 Stainless-Steel***
9	Gland	304 Stainless-Steel
10	Spring Washer	304 Stainless-Steel
11	Stem Nut	304 Stainless-Steel
12	Handle	304 Stainless-Steel
13	Locking Device	304 Stainless-Steel***
14	Handle Sleeve	PVC

Dimensions

Part No.	Model No.	Size	A	B	C	D
4428-346	2032SST	1/2"	0.59"	2.36"	3.92"	2.38"
4428-347	2032SST	3/4"	0.79"	2.76"	4.84"	2.48"
4428-348	2032SST	1"	0.98"	3.25"	5.87"	3.13"
4428-349	2032SST	1 1/4"	1.26"	3.80"	5.87"	3.39"
4428-350	2032SST	1 1/2"	1.50"	4.33"	7.48"	4.00"
4428-351	2032SST	2"	1.97"	5.28"	7.48"	4.30"

PRESSURE-TEMPERATURE RATING

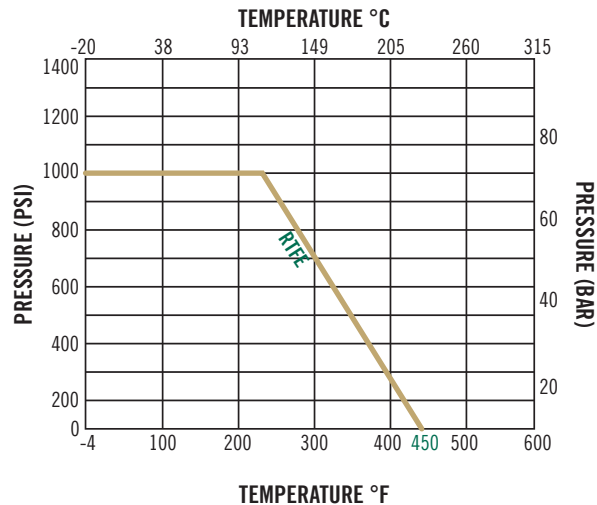

1000 WOG
150 WSP

SUBMITTAL INFORMATION

- Available Sizes: 1/2" - 2"
 - Heavy Duty, 316 Stainless-Steel (1/2"-1")
 - Locking Handle (1/2"-1")
 - 1,000 WOG
 - 150 WSP
 - Temperature rating -4°F to 392°F
 - Blow out proof stem
 - Threads conform to ANSI B1.20.1
- *** 1 1/4", 1 1/2" and 2" ball valves are made of 304 stainless-steel and do not have locking handles

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
 4800 Chavenelle Rd
 Dubuque, IA 52002

Toll Free: 1-800-292-2737
 sales@aymcdonald.com
 aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: