
SUBMITTAL DATA SHEET

No-Lead Full Port Ball Valve — 72028PF (Sizes 2 1/2", 3" and 4" with green handle)

CTS (Press Fit) x CTS (Press Fit)



A.Y. McDonald Mfg. Co. carries a full line of No-Lead Full Port Ball Valves that are constructed of heavy duty no-lead brass and can be used with a full range of liquids and gases in commercial, industrial and residential applications. Full Port valves allow for maximum flow with minimum pressure drop.

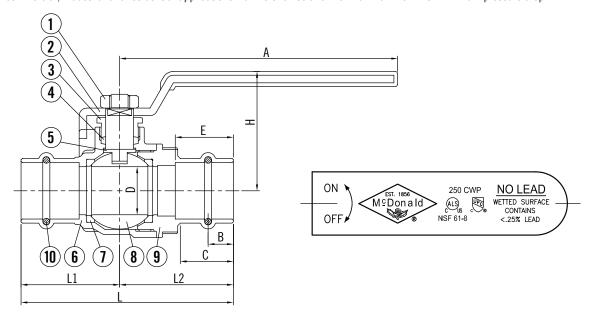

Materials

No.	Part	Material			
1	Nut	Steel			
2	Handle	Steel			
3	Stem Gland Screw	Brass			
4	Stem Packing	Teflon PTFE			
5	Stem	Brass			
6	Body	No-Lead Brass			
7	Ball Disc Packing	Teflon PTFE			
8	Ball Disc	No-Lead Brass			
9	End Plug	No-Lead Brass			
10	0-Ring	EPDM			

Dimensions

Model	Size	L	Н	D	Α	В	C	E	L1	L2
72028PF	2 1/2"	7.56	3.54	2.48	7.87	0.79	1.54	1.65	3.78	3.78
72028PF	3"	8.23	3.90	2.95	7.87	0.79	1.54	1.91	4.13	4.13
72028PF	4"	8.66	3.90	2.95	7.87	0.79	1.54	2.42	4.33	4.33

(See "72028PF Yellow Handle" submittal for sizes: 1/2" - 2")

SUBMITTAL INFORMATION

- 250 PSI Non-Shock Cold Working Pressure
- Blowout proof stem

- Forged brass body

- Forged brass body
- ***2 1/2", 3", and 4" Requires XLC installation jaws





NSF 61-8

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co. 4800 Chavenelle Rd Dubuque, IA 52002

Toll Free: 1-800-292-2737 sales@aymcdonald.com aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: