
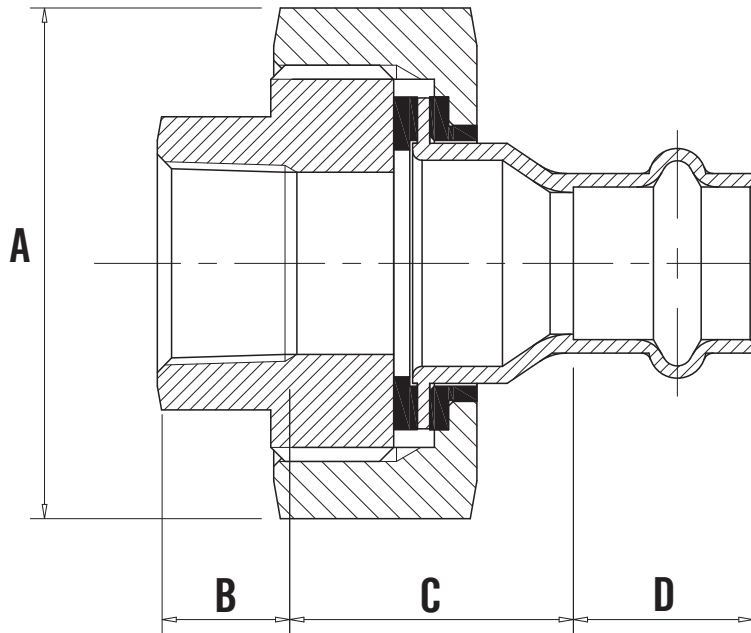


SUBMITTAL DATA SHEET

No-Lead
Dielectric Union - 71910F

FNPT x CTS (Press Fit)



Dimensions

Part No.	Model No.	Size	A	B	C	D
5419-394	71910F	1/2"	1.89"	0.53"	1.20"	0.75"
5419-395	71910F	3/4"	2.17"	0.55"	1.22"	0.91"
5419-396	71910F	1"	2.60"	0.69"	1.10"	0.91"
5419-397	71910F	1 1/4"	2.60"	0.69"	1.20"	1.02"
5419-398	71910F	1 1/2"	3.23"	0.73"	1.32"	1.42"
5419-399	71910F	2"	3.74"	0.77"	1.44"	1.58"

SUBMITTAL INFORMATION

- Available Sizes: 1/2", 3/4", 1", 1 1/4", 1 1/2" and 2"
- 99.9% Wrot Copper
- Max Temperature: 250°F
- Pressure Rating: 200 PSI
- NSF/ANSI 61-G
- For use in commercial and residential applications, to prevent galvanic corrosion and stray current, when joining copper to steel.

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
4800 Chavenelle Rd
Dubuque, IA 52002

Toll Free: 1-800-292-2737
sales@aymcdonald.com
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: