
SUBMITTAL DATA SHEET

NL Plug Style Corporation Stop – 74701PITO $\frac{3}{4} \ge 4.00$



AWWA/CC with Pito Tube x Flare

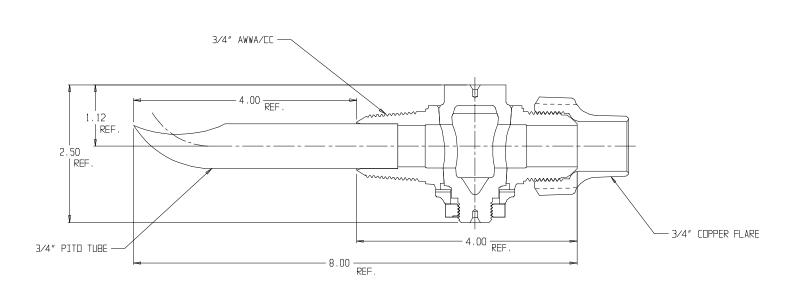

SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components in contact with potable water conform to ASTM B584, UNS C89833 (latest revision) and identified with "NL"
- Certified to NSF/ANSI 61 and NSF/ANSI 372
- Brass components not in contact with potable water conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5-5 (latest revision)
- Large wrench flats provided for proper installation
- Plug rotates 360°
- ¹/₂" 1" rated for 100 PSIG water pressure
- 1 ¹/₄" 2" rated for 80 PSIG water pressure



A.Y. McDonald Mfg. Co. 4800 Chavenelle Rd Dubuque, IA 52002 **Toll Free:** 1-800-292-2737 sales@aymcdonald.com <u>aymcdonald.com</u>

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: