


SUBMITTAL DATA SHEET



NL Ball Style Curb Stop – 76100DB-22

-22 CTS Compression x -22 CTS Compression with Dielectric Bushing

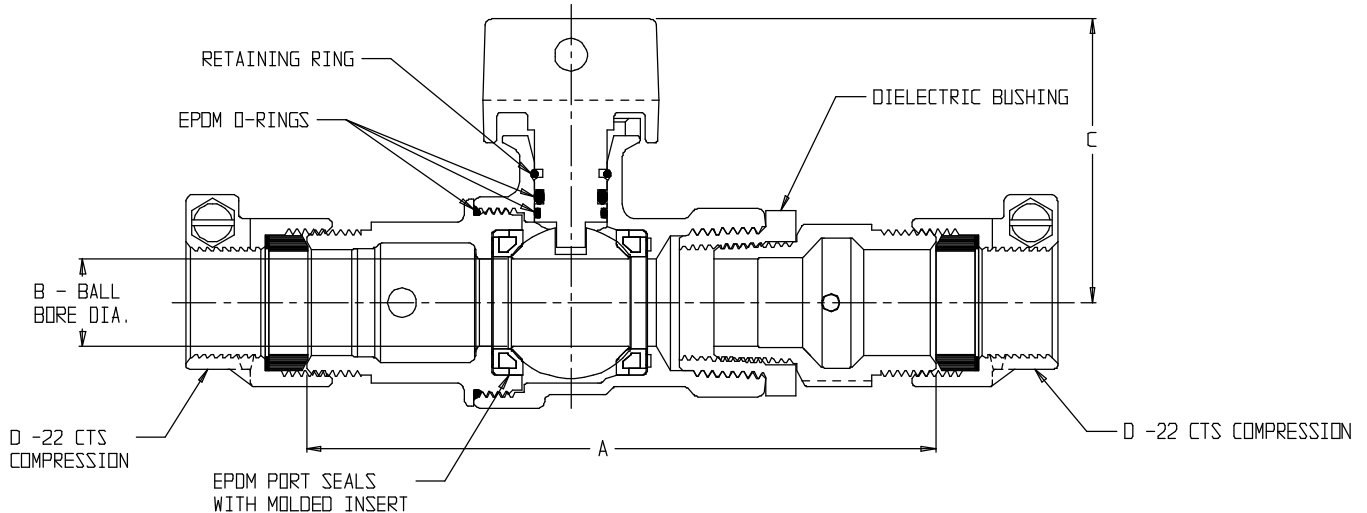

NOTE: ACTUAL ASSEMBLY LENGTHS WILL VARY

MODEL	SIZE	A	B	C	D	E
76100DB-22	3/4	5.42	.75	2.42	3/4	3/4
76100DB-22	1	6.48	1.00	2.65	1	1
76100DB-22	1 1/2	7.60	1.50	3.40	1 1/2	1 1/2
76100DB-22	2	10.03	2.00	3.71	2	2

SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components in contact with potable water conform to ASTM B584, UNS C89833 (latest revision) and identified with "NL"
- Certified to NSF/ANSI 61 and NSF/ANSI 372
- Brass components not in contact with potable water conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5-5 (latest revision)
- PTFE coated brass ball
- Valve rated for 300 PSIG water pressure, end connections not to exceed rated pipe pressures.
- Blow out proof EPDM port seals
- End piece joint sealed with an EPDM o-ring and thread locker
- Insert stiffeners required on all flexible plastic connections



A.Y. McDonald Mfg. Co.
4800 Chavenelle Rd
Dubuque, IA 52002

Toll Free: 1-800-292-2737
sales@aymcdonald.com
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: