
Installation Instructions



IMPORTANT NOTICE - READ CAREFULLY Yoke Expander with Tamper Proof Screw Option

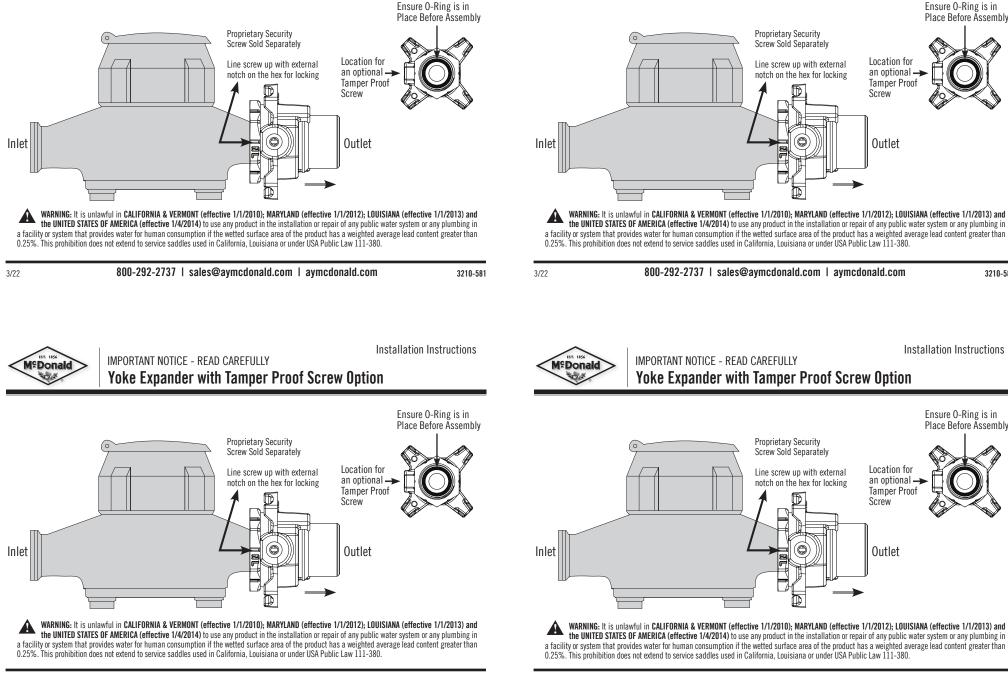

IMPORTANT NOTICE - READ CAREFULLY

Yoke Expander with Tamper Proof Screw Option

M^cDonald

04

3/22

3/22

3210-581

Installation Instructions

Ensure O-Ring is in

Place Before Assembly

Installation Instructions

Ensure O-Ring is in

Location for

an optional 🛶

Tamper Proof

Screw

Outlet

Location for

an optional 🛶

Tamper Proof

Screw

Outlet

Place Before Assembly



- 1. Keep expander clean and free from dirt and debris.
- 2. Use a snug fitting smooth jaw wrench on the wrenching flat nearest the tightened end.
- 3. Always use an approved sealant or teflon tape on tapered pipe threads.
- 4. DO NOT use Vaseline $\ensuremath{\mathbb{R}}$, plumber's grease, or any other petroleum based product on seals or 0-Rings.
- 5. USE ONLY ON COLD WATER SERVICES.
- 6. Notches indicate locking positions to line up with screw.
- 7. Locking screw uses left hand threads and proprietary key (sold separately).



- 1. Keep expander clean and free from dirt and debris.
- 2. Use a snug fitting smooth jaw wrench on the wrenching flat nearest the tightened end.

Yoke Expander with Tamper Proof Screw Option

3. Always use an approved sealant or teflon tape on tapered pipe threads.

IMPORTANT NOTICE - READ CAREFULLY

- 4. DO NOT use Vaseline $\ensuremath{\mathbb{R}}$, plumber's grease, or any other petroleum based product on seals or 0-Rings.
- 5. USE ONLY ON COLD WATER SERVICES.
- 6. Notches indicate locking positions to line up with screw.
- 7. Locking screw uses left hand threads and proprietary key (sold separately).

3/22

800-292-2737 | sales@aymcdonald.com | aymcdonald.com



Installation Instructions
IMPORTANT NOTICE - READ CAREFULLY
Yoke Expander with Tamper Proof Screw Option

- 1. Keep expander clean and free from dirt and debris.
- 2. Use a snug fitting smooth jaw wrench on the wrenching flat nearest the tightened end.
- $\ensuremath{\mathsf{3}}.$ Always use an approved sealant or teflon tape on tapered pipe threads.
- 4. DO NOT use Vaseline $\ensuremath{\mathbb{R}}$, plumber's grease, or any other petroleum based product on seals or 0-Rings.
- 5. USE ONLY ON COLD WATER SERVICES.
- ${\rm 6.\,Notches}$ indicate locking positions to line up with screw.
- $7. \mbox{Locking screw uses left}$ hand threads and proprietary key (sold separately).



3/22

Installation Instructions
IMPORTANT NOTICE - READ CAREFULLY

Yoke Expander with Tamper Proof Screw Option

800-292-2737 | sales@aymcdonald.com | aymcdonald.com

- 1. Keep expander clean and free from dirt and debris.
- 2. Use a snug fitting smooth jaw wrench on the wrenching flat nearest the tightened end.
- 3. Always use an approved sealant or teflon tape on tapered pipe threads.
- 4. DO NOT use Vaseline $\ensuremath{\mathbb{R}}$, plumber's grease, or any other petroleum based product on seals or 0-Rings.
- 5. USE ONLY ON COLD WATER SERVICES.
- 6. Notches indicate locking positions to line up with screw.
- 7. Locking screw uses left hand threads and proprietary key (sold separately).

3/22

3210-581

3210-581