


SUBMITTAL DATA SHEET

No-Lead
Quarter Turn Supply Stops – 72082Q

CTS (Push-Fit) x Compression



A.Y. McDonald Mfg. Co. Push-Fit Supply Stops are designed to control the flow of water to household plumbing fixtures, such as toilets, faucets, dishwashers and icemakers. They are ideal for installation in tight spaces, work on wet lines, are removable and great for repair work. Push-Fit end connections eliminate the need for soldering, crimping, or solvent welding and are to be used for aboveground, indoor water applications.

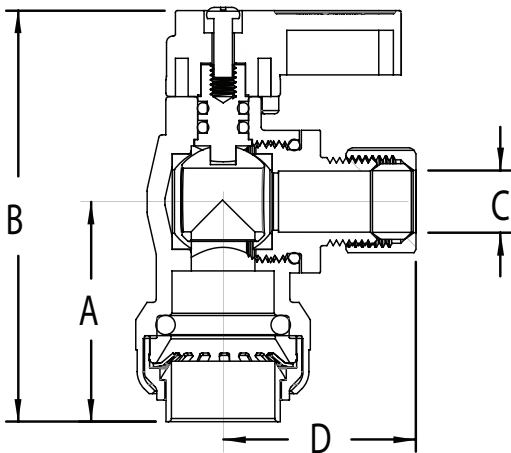

Dimensions

Part No.	Model No.	Size	A	B	C	D
5426-048	72082Q	1/2" x 3/8"	1.40"	2.56"	0.39"	1.19"

Materials

Part	Material
Body	No-Lead Brass
Ball	No-Lead Brass
Handle	Zinc
Seat Ring	PTFE
Stem	No-Lead Brass
Stem O-Ring	NBR
Gripper Ring	SS 304
Inlet O-Ring	EPDM - NSF 61

SUBMITTAL INFORMATION

Product Features

- Rated to 100 PSI at a maximum temperature of 160°F
- Chrome plated body
- Fast installation, requiring no special tools
- NO solder, NO flux, NO fire hazards

Tubing Application:

- PEX Tubing - in accordance with ASTM F876 and F877
- CTS CPVC Pipe - in accordance with ASTM D2846/2846M
- Copper Pipe - in accordance with ASTM B88
- NSF/ANSI 61-8 & NSF/ANSI 372

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
4800 Chavenelle Rd
Dubuque, IA 52002

Toll Free: 1-800-292-2737
sales@aymcdonald.com
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: