



SUBMITTAL DATA SHEET

No-Lead
Stainless-Steel Water Heater Connector – 2106

CTS (Push-Fit) x FNPT



A.Y. McDonald Mfg. Co. extensive line of plumbing products includes water heater connectors. These quality, braided, stainless-steel, water flex lines are ideal for installation in tight spaces, work on wet lines, are removable and great for repair work. The Push-Fit end connection eliminates the need for soldering, crimping, and solvent welding.

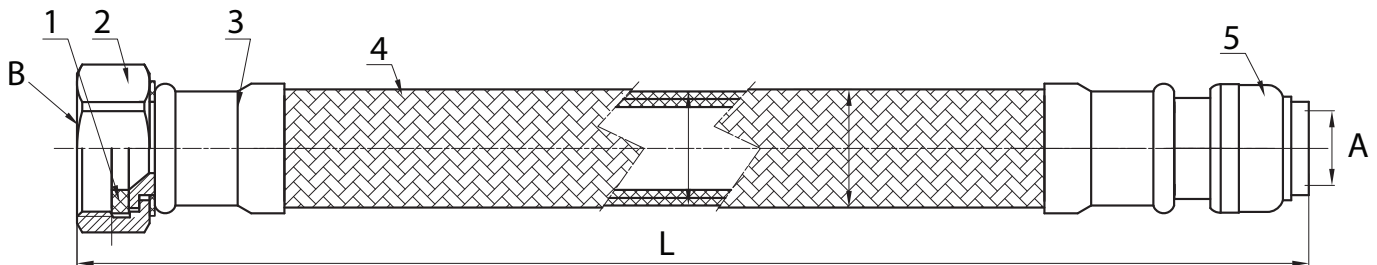

Materials

No.	Part	Material
1	Washer	EPDM
2	Nut	No-Lead Brass
3	Ferrule	Stainless-Steel
4	Tubing / Wire	PVC / Stainless-Steel
5	Push-Fit with Insert	No-Lead Brass

Dimensions

Size	L	A	B
1/2" x 3/4" x 15"	15"	1/2" Push-Fit	3/4" FNPT
1/2" x 3/4" x 18"	18"	1/2" Push-Fit	3/4" FNPT
1/2" x 3/4" x 24"	24"	1/2" Push-Fit	3/4" FNPT
3/4" x 3/4" x 15"	15"	3/4" Push-Fit	3/4" FNPT
3/4" x 3/4" x 18"	18"	3/4" Push-Fit	3/4" FNPT
3/4" x 1" x 24"	24"	3/4" Push-Fit	1" FNPT

SUBMITTAL INFORMATION

Push-Fit End Connection:

- Comes with an insert for use on PEX tubing
- Removable with Release Tool (sold separately)
- Fast installation, requiring no special tools
- NO solder, NO flux, NO fire hazards

Use Push-Fit with:

- Pex tubing in accordance with ASTM F-876 and F-877
- Copper tubing in accordance with ASTM B88
- CPVC tubing in accordance with ASTM D2846/2846M-99

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
4800 Chavenelle Rd
Dubuque, IA 52002

Toll Free: 1-800-292-2737
sales@aymcdonald.com
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: