
## SUBMITTAL DATA SHEET


## NL Ball Style Meter Stop - 76100MW-44

-44 PVC Compression x Meter



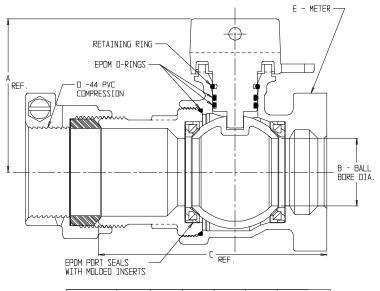

MODEL	SIZE	А	В	С	D	E
76100MW-44	1 1/2	3.40	1.50	5.05	1 1/2	1 1/2
76100MW-44	2	3.71	2.00	7.32	2	1 1/2 DR 2

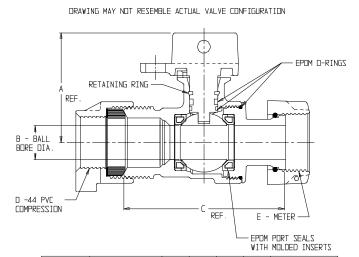

MODEL NO.	ZIZE	A	В	С	D	E
76100MW-44	3/4 X 5/8 X 3/4	2.33	.63	3.90	3/4	5/8 X 3/4, 3/4
76100MW-44	3/4	2.43	. 75	3.56	3/4	5/8 X 3/4, 3/4
76100MW-44	3/4 X 3/4 x 5/8	2.33	. 75	3.90	3/4	5/8
76100MW-44	1	2.65	1.00	4.89	1	1

## SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components in contact with potable water conform to ASTM B584, UNS C89833 (latest revision) and identified with "NL"
- Certified to NSF/ANSI 61 and NSF/ANSI 372
- Brass components not in contact with potable water conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5-5 (latest revision)
- PTFE coated brass ball
- Valve rated for 300 PSIG water pressure, end connections not to exceed rated pipe pressures.
- Blow out proof EPDM port seals
- · End piece joint sealed with an EPDM o-ring and thread locker



**A.Y. McDonald Mfg. Co.** 4800 Chavenelle Rd Dubuque, IA 52002

**Toll Free:** 1-800-292-2737 sales@aymcdonald.com

aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: 04-20