


SUBMITTAL DATA SHEET

NL Ball Style Curb Stop – 76100W-55

-55 IPS Compression x -55 IPS Compression



DRAWING MAY NOT RESEMBLE ACTUAL VALVE CONFIGURATION

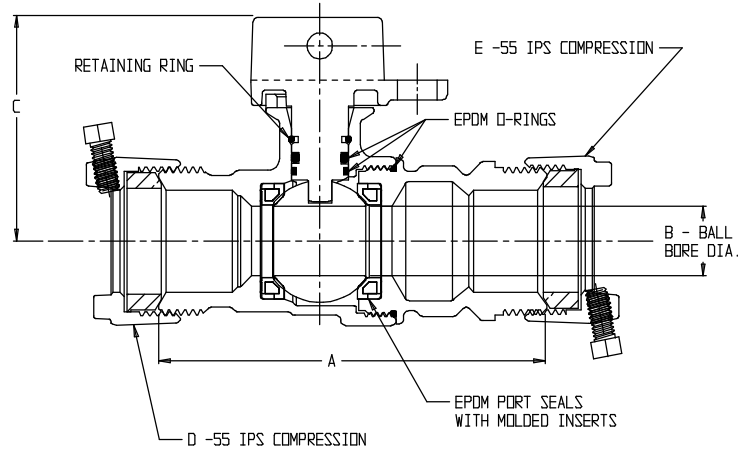

MODEL	SIZE	A	B	C	D	E
76100W-55	3/4	4.25	.75	2.42	3/4	3/4
76100W-55	3/4 X 1 X 1	4.49	1.00	2.64	3/4	1
76100W-55	1	4.91	1.00	2.64	1	1
*76100W-55	1 1/2	7.33	1.50	3.40	1 1/2	1 1/2
76100W-55	2	8.76	2.00	3.71	2	2

*NOTE: 1 1/2 IS A 2 PIECE ASSEMBLY CONSISTING OF A 76102W-55 1 1/2 AND A 74753-55 1 1/2

SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components in contact with potable water conform to ASTM B584, UNS C89833 (latest revision) and identified with "NL"
- Certified to NSF/ANSI 61 and NSF/ANSI 372
- Brass components not in contact with potable water conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5-5 (latest revision)
- PTFE coated brass ball
- Valve rated for 300 PSIG water pressure, end connections not to exceed rated pipe pressures.
- Blow out proof EPDM port seals
- End piece joint sealed with an EPDM o-ring and thread locker



A.Y. McDonald Mfg. Co.
4800 Chavenelle Rd
Dubuque, IA 52002

Toll Free: 1-800-292-2737
sales@aymcdonald.com
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: