


# SUBMITTAL DATA SHEET

## NL Ball Style Curb Stop – 76102QA

Q CTS Compression x FNPT



MODEL	SIZE	A	B	C	D	E
76102QA	3/4 X 5/8 X 3/4	2.95	.63	2.31	3/4	3/4
76102QA	3/4	3.24	.75	2.44	3/4	3/4
76102QA	1 X 3/4 X 1	3.42	.75	2.44	1	1
76102QA	1	3.76	1.00	2.65	1	1
76102QA	1 1/4 X 1 X 1	4.06	1.00	2.65	1 1/4	1
76102QA	1 1/4 X 1 X 1 1/4	4.20	1.00	2.65	1 1/4	1 1/4
76102QA	1 1/2	4.87	1.50	3.39	1 1/2	1 1/2
76102QA	2	5.79	2.00	3.70	2	2

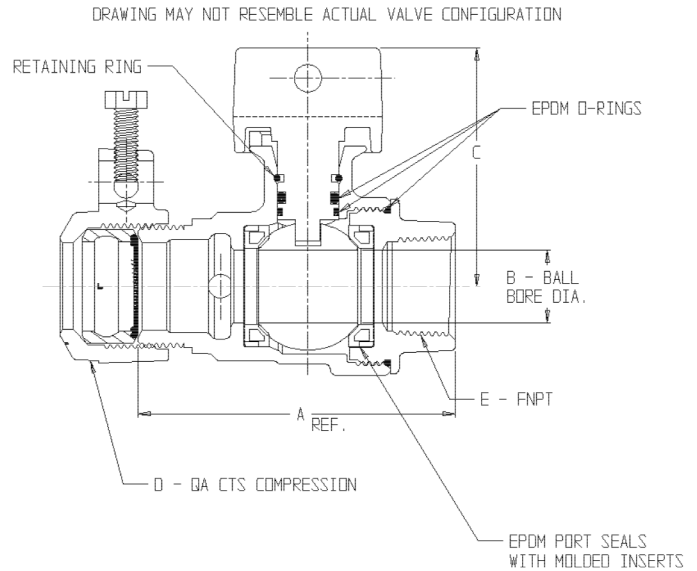

### SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components in contact with potable water conform to ASTM B584, UNS C89833 (latest revision) and identified with “NL”
- Certified to NSF/ANSI 61 and NSF/ANSI 372
- Brass components not in contact with potable water conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5-5 (latest revision)
- PTFE coated brass ball
- Valve rated for 300 PSIG water pressure, end connections not to exceed rated pipe pressures.
- Blow out proof EPDM port seals
- End piece joint sealed with an EPDM o-ring and thread locker
- Insert stiffeners required on all flexible plastic connections



**A.Y. McDonald Mfg. Co.**  
4800 Chavenelle Rd  
Dubuque, IA 52002

**Toll Free: 1-800-292-2737**  
sales@aymcdonald.com  
[aymcdonald.com](http://aymcdonald.com)

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

**Submitted by:**

04-20