


# SUBMITTAL DATA SHEET

## SS Strap Saddle – 3845AU

C905 PVC x AWWA/CC



| MODEL  | SIZE       | A     | B    | C    | D           |
|--------|------------|-------|------|------|-------------|
| 3845AU | 14 X 3/4   | 3/4   | 5.00 | 3.46 | 15.30-16.25 |
| 3845AU | 14 X 1     | 1     | 5.00 | 3.46 | 15.30-16.25 |
| 3845AU | 14 X 1 1/2 | 1 1/2 | 5.00 | 3.46 | 15.30-16.25 |
| 3845AU | 14 X 2     | 2     | 5.00 | 3.46 | 15.30-16.25 |
| 3845AU | 16 X 3/4   | 3/4   | 5.00 | 3.46 | 17.40-18.40 |
| 3845AU | 16 X 1     | 1     | 5.00 | 3.46 | 17.40-18.40 |
| 3845AU | 16 X 1 1/2 | 1 1/2 | 5.00 | 3.46 | 17.40-18.40 |
| 3845AU | 16 X 2     | 2     | 5.00 | 3.46 | 17.40-18.40 |
| 3845AU | 20 X 3/4   | 3/4   | 5.00 | 3.46 | 21.20-22.20 |
| 3845AU | 20 X 1     | 1     | 5.00 | 3.46 | 21.20-22.20 |
| 3845AU | 20 X 1 1/2 | 1 1/2 | 5.00 | 3.46 | 21.20-22.20 |
| 3845AU | 20 X 2     | 2     | 5.00 | 3.46 | 21.20-22.20 |
| 3845AU | 24 X 3/4   | 3/4   | 5.00 | 3.46 | 23.80-24.80 |
| 3845AU | 24 X 1     | 1     | 5.00 | 3.46 | 23.80-24.80 |
| 3845AU | 24 X 1 1/2 | 1 1/2 | 5.00 | 3.46 | 23.80-24.80 |
| 3845AU | 24 X 2     | 2     | 5.00 | 3.46 | 23.80-24.80 |

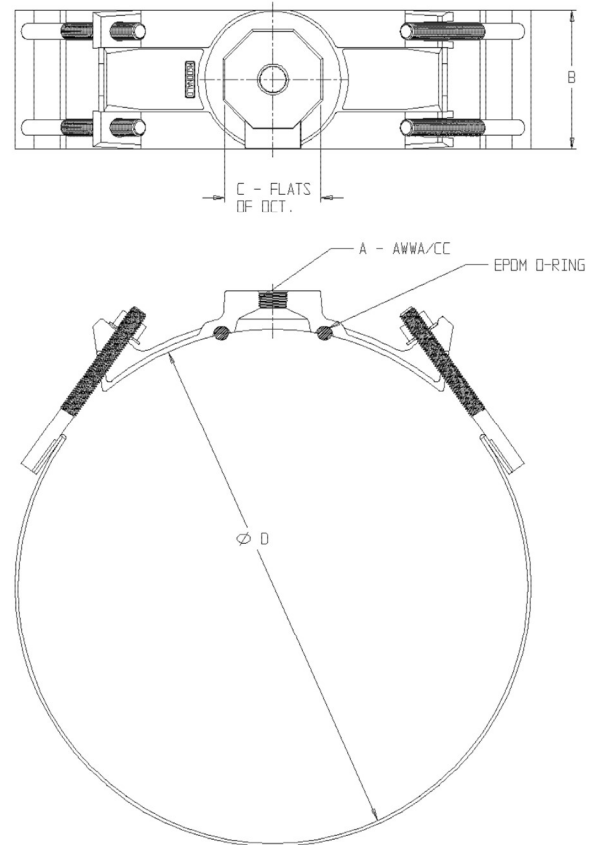

### SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5-5 (latest revision)
- Certified to NSF/ANSI 61
- 304L Stainless Steel strap(s) and studs. Stainless steel nuts (PTFE coated) and washers
- EPDM o-ring
- Pipe and tap size, and thread type identified on saddle
- Outlet boss with large wrench flats



**A.Y. McDonald Mfg. CO.**  
4800 Chavenelle Rd  
Dubuque, IA 52002

**Toll Free: 1-800-292-2737**  
sales@aymcdonald.com  
[aymcdonald.com](http://aymcdonald.com)

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

**Submitted by:**