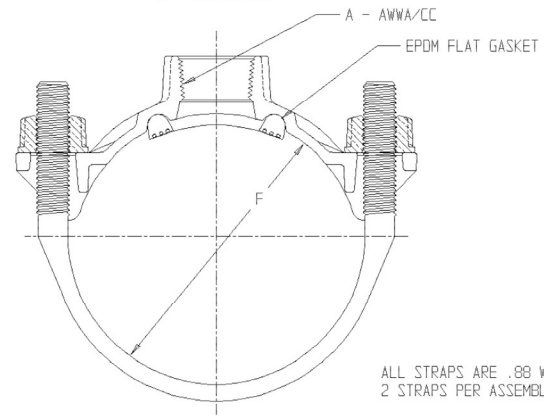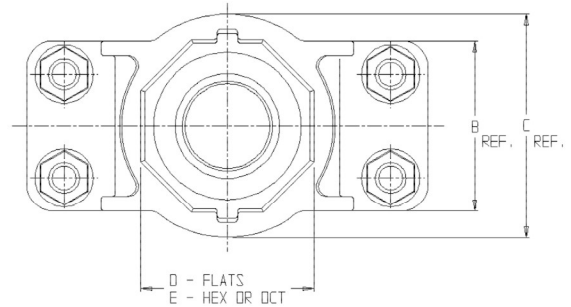# SUBMITTAL DATA SHEET

Silicon Bronze Strap Saddle – 3825F

Ductile Iron/Cement-Asbestos/Cast Iron - AWWA/CC

MODEL	SIZE	A	B	C	D	E	F
3825F	4 X 3/4	3/4	3.19	3.19	1.69	HEX	4.74 - 5.40
3825F	4 X 1	1	3.19	3.19	1.69	HEX	4.74 - 5.40
3825F	4 X 1 1/2	1 1/2	3.19	4.19	3.10	OCT	4.74 - 5.40
3825F	4 X 2	2	3.19	4.19	3.45	OCT	4.74 - 5.40
3825F	6 X 3/4	3/4	3.19	3.19	1.69	HEX	6.84 - 7.50
3825F	6 X 1	1	3.19	3.19	1.69	HEX	6.84 - 7.50
3825F	6 X 1 1/4	1 1/4	3.19	4.19	3.10	OCT	6.84 - 7.50
3825F	6 X 1 1/2	1 1/2	3.19	4.19	3.10	OCT	6.84 - 7.50
3825F	6 X 2	2	3.19	4.19	3.45	OCT	6.84 - 7.50
3825F	8 X 3/4	3/4	3.19	3.19	1.69	HEX	8.99 - 9.67
3825F	8 X 1	1	3.19	3.19	1.69	HEX	8.99 - 9.67
3825F	8 X 1 1/4	1 1/4	3.19	4.19	3.10	OCT	8.99 - 9.67
3825F	8 X 1 1/2	1 1/2	3.19	4.19	3.10	OCT	8.99 - 9.67
3825F	8 X 2	2	3.19	4.19	3.45	OCT	8.99 - 9.67
3825F	10 X 3/4	3/4	3.19	3.19	1.69	HEX	11.04 - 12.12
3825F	10 X 1	1	3.19	3.19	1.69	HEX	11.04 - 12.12
3825F	10 X 1 1/2	1 1/2	3.19	4.19	3.10	OCT	11.04 - 12.12
3825F	10 X 2	2	3.19	4.19	3.45	OCT	11.04 - 12.12
3825F	12 X 3/4	3/4	3.19	3.19	1.69	HEX	13.20 - 14.38
3825F	12 X 1	1	3.19	3.19	1.69	HEX	13.20 - 14.38
3825F	12 X 1 1/2	1 1/2	3.19	4.19	3.10	OCT	13.20 - 14.38
3825F	12 X 2	2	3.19	4.19	3.45	OCT	13.20 - 14.38

B REF. C REF.

D - FLATS
E - HEX OR OCT

A - AWWA/CC

EPDM FLAT GASKET

F

ALL STRAPS ARE .88 WIDE
2 STRAPS PER ASSEMBLY

DRAWING MAY NOT RESEMBLE
ACTUAL SADDLE CONFIGURATION

SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5-5 (latest revision)
- Certified to NSF/ANSI 61
- Silicon Bronze strap(s) and cast brass nuts with enlarged washer bearing surface
- EPDM flat gasket
- Pipe and tap size, and thread type identified on saddle
- Outlet boss with large wrench flats

Submitted by:

03-23