


SUBMITTAL DATA SHEET

23000 Series
 4" No-Lead Domestic Stainless Steel Submersible Pumps
J - 5 GPM



A.Y. McDonald offers a full line of stainless steel submersible pumps built for years of trouble free operation, with high-efficiency impellers and diffusers. These submersibles offer peak capacity performance in 5, 7, 10, 15, 20, and 25 gallons per minute (GPM). Other features include stainless steel discharge head with a built-in check valve, and stainless steel shaft and coupling.

All Stainless Steel Pumps come with a 1 1/4" discharge and sizes range from 1/3 to 1 1/2 horsepower (HP). Two or three wire models up to 1 1/2 horsepower (HP).

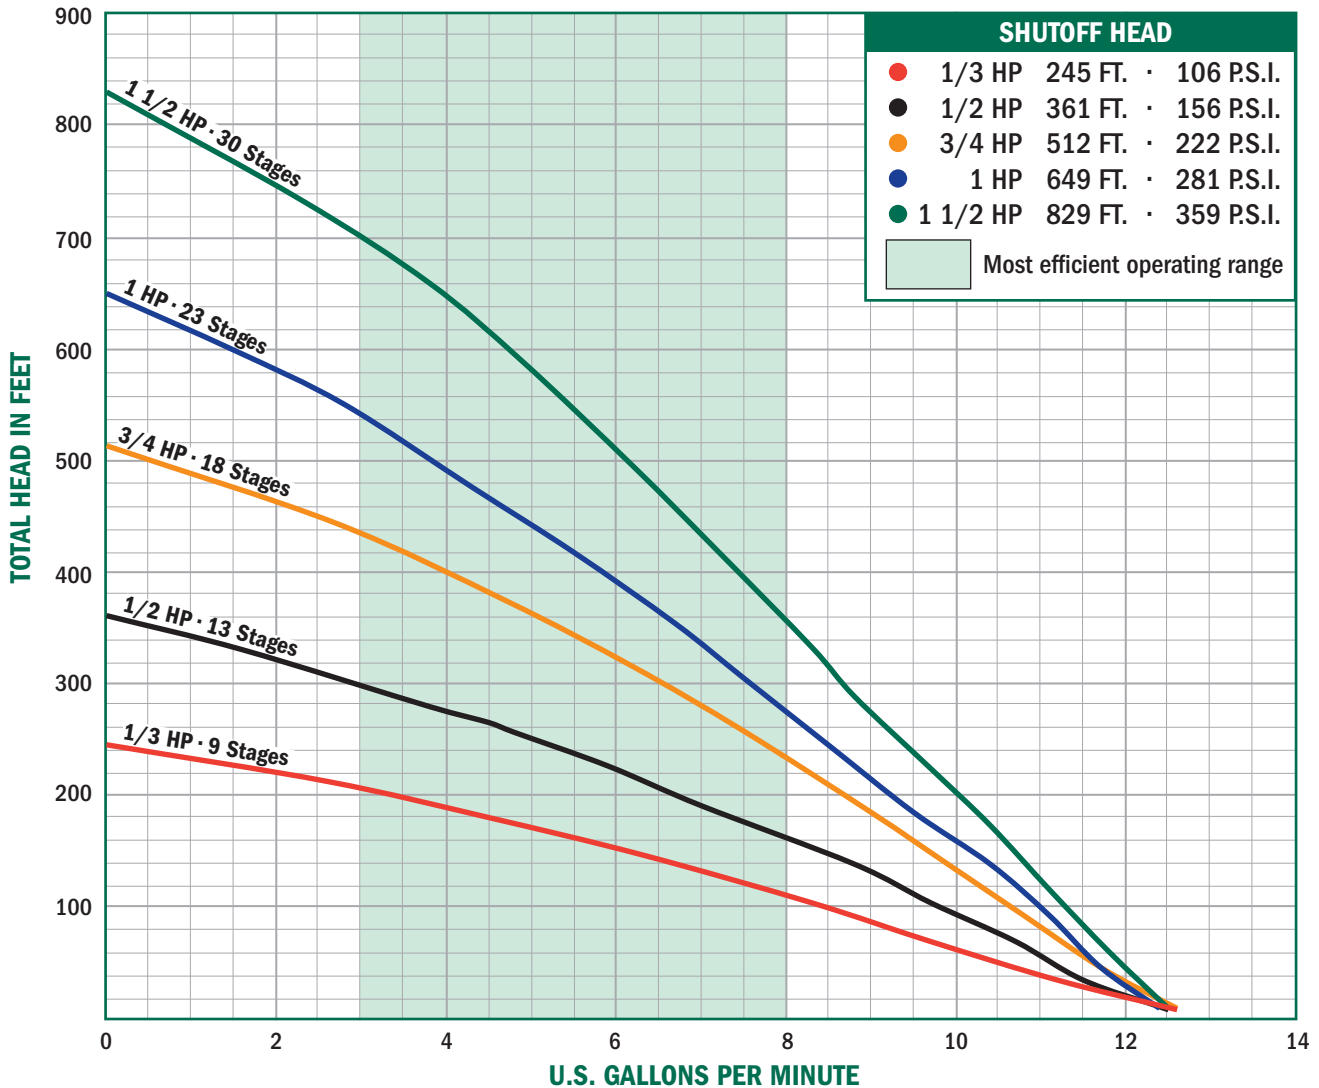

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
 4800 Chavenelle Rd
 Dubuque, IA 52002

Toll Free: 1-800-292-2737
 sales@aymcdonald.com
 aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by:

SUBMITTAL DATA SHEET

23000 Series 4" No-Lead Domestic Stainless Steel Submersible Pumps J - 5 GPM



Two Wire Single Phase

Part No.	Model No.	HP	Stages	Volt	A	B	Wt.
6622-010	23030J2A*	1/3	9	115	13.5"	13.4"	26.0
6622-009	23030J2*	1/3	9	230	13.5"	13.4"	26.3
6622-038	23050J2A	1/2	13	115	16.7"	13.4"	27.6
6622-037	23050J2	1/2	13	230	16.7"	13.0"	27.2
6622-061	23075J2	3/4	18	230	20.7"	13.8"	31.0
6622-077	23100J2	1	23	230	25.9"	16.8"	36.9
6622-003	23150J2	1 1/2	30	230	31.5"	18.5"	48.4

Three Wire** Single Phase

Part No.	Model No.	HP	Stages	Volt	A	B	Wt.
6622-012	23030J3A*	1/3	9	115	13.5"	9.5"	28.0
6622-011	23030J3*	1/3	9	230	13.5"	9.5"	27.0
6622-040	23050J3A	1/2	13	115	16.7"	9.5"	31.3
6622-039	23050J3	1/2	13	230	16.7"	10.5"	31.3
6622-062	23075J3	3/4	18	230	20.7"	11.3"	37.4
6622-078	23100J3	1	23	230	25.9"	13.6"	43.0
6622-005	23150J3	1 1/2	30	230	31.5"	16.2"	31.3

Three Wire** Three Phase

Part No.	Model No.	HP	Stages	Volt	A	B	Wt.
6650-288	23150J3Z	1 1/2	30	230	31.5"	13.6"	41.8

4" Stainless Steel Pump Ends


Part No.	Model No.	HP	Wt.
6622-008	23030J	1/3	9
6622-036	23050J	1/2	10
6622-060	23075J	3/4	12
6622-076	23100J	1	13
6622-007	23150J	1 1/2	18

* All one-third horsepower pumps are furnished with one-half horsepower motors (and control boxes where applicable).

** All three wire pumps are available in three phase by selecting pump end and appropriate motor and starter kit.

Pump end discharge
1 1/4" FNPT

3 3/4" diameter
with cable guard

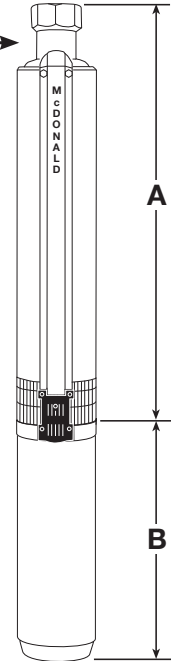

Output - in Gallons Per Minute (Depth to Water)

HP	PSI	25'	50'	75'	100'	125'	150'	175'	200'	225'
1/3	0	11.7	10.6	9.5	8.4	7.3	6.1	4.8	3.4	1.8
	30	8.6	7.5	6.4	5.1	3.8	2.2			
	40	7.6	6.4	5.2	3.9	2.3				
	50	6.5	5.3	4.0	2.5					

HP	PSI	25'	50'	75'	100'	125'	150'	175'	200'	225'	250'	275'	300'	325'
1/2	0	11.9	11.2	10.5	9.8	9.1	8.4	7.6	6.8	6.0	5.0	4.1	3.0	1.8
	30	10.0	9.2	8.5	7.8	7.0	6.1	5.3	4.3	3.2	2.1			
	40	9.3	8.6	7.8	7.0	6.2	5.3	4.4	3.3	2.2				
	50	8.6	7.9	7.1	6.3	5.4	4.4	3.4	2.3					
	60	7.9	7.2	6.3	5.5	4.5	3.5	2.3						

HP	PSI	25'	50'	75'	100'	125'	150'	175'	200'	225'	250'	275'	300'	325'	350'	375'	400'	425'	450'
3/4	0	12.2	11.7	11.2	10.7	10.2	9.7	9.2	8.7	8.1	7.6	7.1	6.5	5.9	5.3	4.7	4.0	3.3	2.6
	30	10.8	10.3	9.8	9.3	8.8	8.3	7.7	7.2	6.6	6.1	5.5	4.9	4.2	3.5	2.7	1.9		
	40	10.3	9.8	9.3	8.8	8.3	7.8	7.2	6.7	6.1	5.5	4.9	4.3	3.6	2.8	2.0			
	50	9.9	9.4	8.9	8.3	7.8	7.3	6.7	6.2	5.6	4.9	4.3	3.6	2.9	2.0				
	60	9.4	8.9	8.4	7.9	7.3	6.8	6.2	5.6	5.0	4.4	3.7	2.9	2.1					

HP	PSI	50'	100'	150'	200'	250'	300'	350'	400'	450'	500'	550'	600'
1	0	11.7	10.9	10.1	9.3	8.4	7.6	6.7	5.8	4.9	3.9	2.7	1.5
	30	10.6	9.8	9.0	8.1	7.3	6.4	5.5	4.5	3.4	2.3		
	40	10.2	9.4	8.6	7.7	6.9	6.0	5.0	4.0	2.9	1.7		
	50	9.9	9.0	8.2	7.3	6.4	5.5	4.6	3.5	2.4			
	60	9.5	8.6	7.8	6.9	6.0	5.1	4.1	3.0	1.8			

HP	PSI	50'	100'	150'	200'	250'	300'	350'	400'	450'	500'	550'	600'	650'	700'	750'
1 1/2	0	12.0	11.3	10.7	10.0	9.3	8.7	8.0	7.4	6.8	6.1	5.4	4.7	3.9	3.0	1.9
	30	11.1	10.4	9.7	9.1	8.5	7.8	7.2	6.5	5.9	5.2	4.4	3.6	2.6	1.5	
	40	10.8	10.1	9.4	8.8	8.2	7.5	6.9	6.2	5.6	4.8	4.0	3.1	2.1		
	50	10.5	9.8	9.1	8.5	7.9	7.2	6.6	5.9	5.2	4.5	3.6	2.7	1.5		
	60	10.1	9.5	8.8	8.2	7.6	6.9	6.3	5.6	4.9	4.1	3.2	2.2			

FRICITION LOSSES IN RISER PIPE
HAVE NOT BEEN CALCULATED

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
4800 Chavenelle Rd
Dubuque, IA 52002

Toll Free: 1-800-292-2737
sales@aymcdonald.com
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: