


SUBMITTAL DATA SHEET

PVC Compression Coupling – 2072

Comp x Comp



A.Y. McDonald Mfg. Co. PVC Fittings feature convenience of operation with excellent flow characteristics.

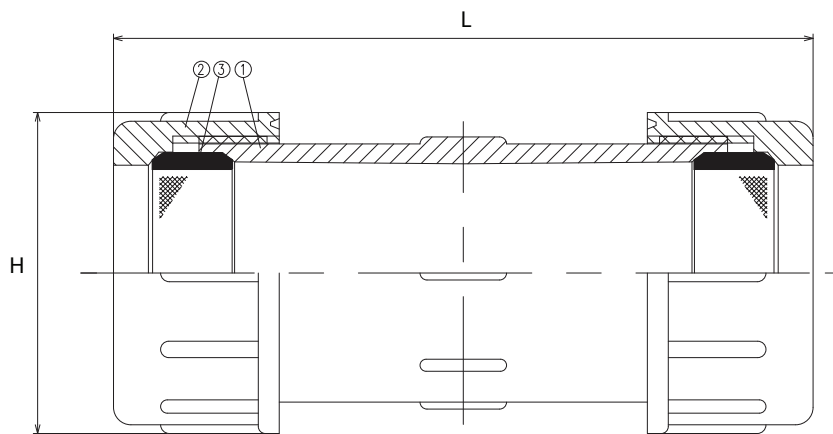

Dimensions

Part No.	Model No.	Size	L	H
4421-173	2072	1/2"	5.11	1.83
4421-174	2072	3/4"	5.51	2.06
4421-175	2072	1"	5.90	2.36
4421-176	2072	1 1/4"	6.41	2.81
4421-177	2072	1 1/2"	6.65	3.12
4421-178	2072	2"	7.87	3.62

Materials

No.	Part	Material
1	Body	PVC
2	Union Nut	PVC
3	Seat	EPDM

SUBMITTAL INFORMATION

- Schedule 80
- Available Sizes: 1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3" and 4"
- Fits schedule 40 and 80 PVC pipe
- Rubber Gaskets

Temperature Ratings:

- 150 PSI at 73°F
- 50 PSI at 140°F

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
4800 Chavenelle Rd
Dubuque, IA 52002

Toll Free: 1-800-292-2737
sales@aymcdonald.com
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: