


SUBMITTAL DATA SHEET

NL Service Fitting – 74758-33-55

-33 PEP Compression x -55 IP Compression

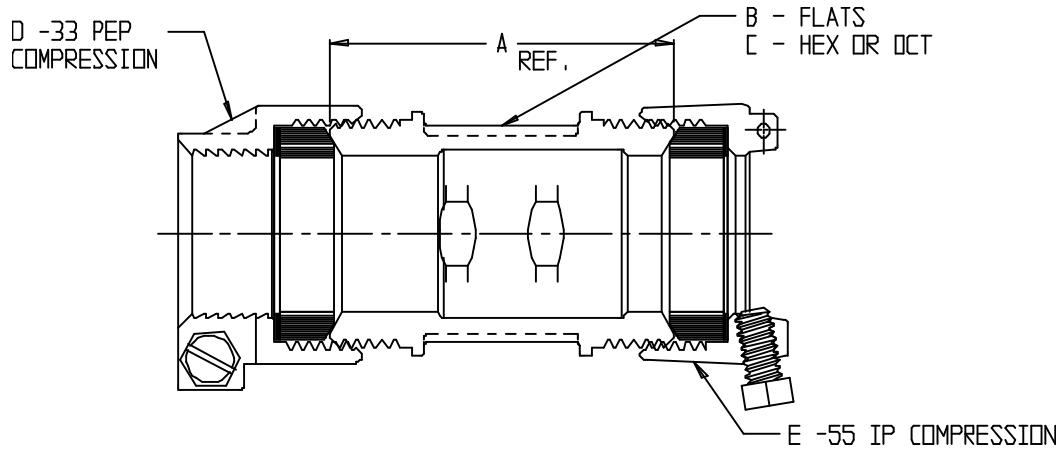

| MODEL | SIZE | A | B | C | D | E |
|-------------|---------|------|------|-----|-----|-----|
| 74758-33-55 | 3/4 | 2.40 | 1.38 | OCT | 3/4 | 3/4 |
| 74758-33-55 | 3/4 X 2 | 2.96 | 3.05 | OCT | 3/4 | 2 |
| 74758-33-55 | 1 | 2.56 | 1.69 | OCT | 1 | 1 |
| 74758-33-55 | 1 X 3/4 | 2.61 | 1.85 | OCT | 1 | 3/4 |

SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components in contact with potable water conform to ASTM B584, UNS C89833 (latest revision) and identified with "NL"
- Certified to NSF/ANSI 61 and NSF/ANSI 372
- Brass components not in contact with potable water conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5-5 (latest revision)
- Large wrench flats provided for proper installation
- Insert stiffeners required on all flexible plastic connections



A.Y. McDonald Mfg. Co.
4800 Chavenelle Rd
Dubuque, IA 52002

Toll Free: 1-800-292-2737
sales@aymcdonald.com
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: