


SUBMITTAL DATA SHEET

24000 Series
 4" No-Lead Stainless Steel Submersible Pumps
L - 15 GPM



All Stainless Steel Submersible Pumps are designed to pump within the 15 gallons per minute (GPM) range. Sizes are available from 1/2 to 5 HP. All models are standard with 1 1/4" NPT discharge.

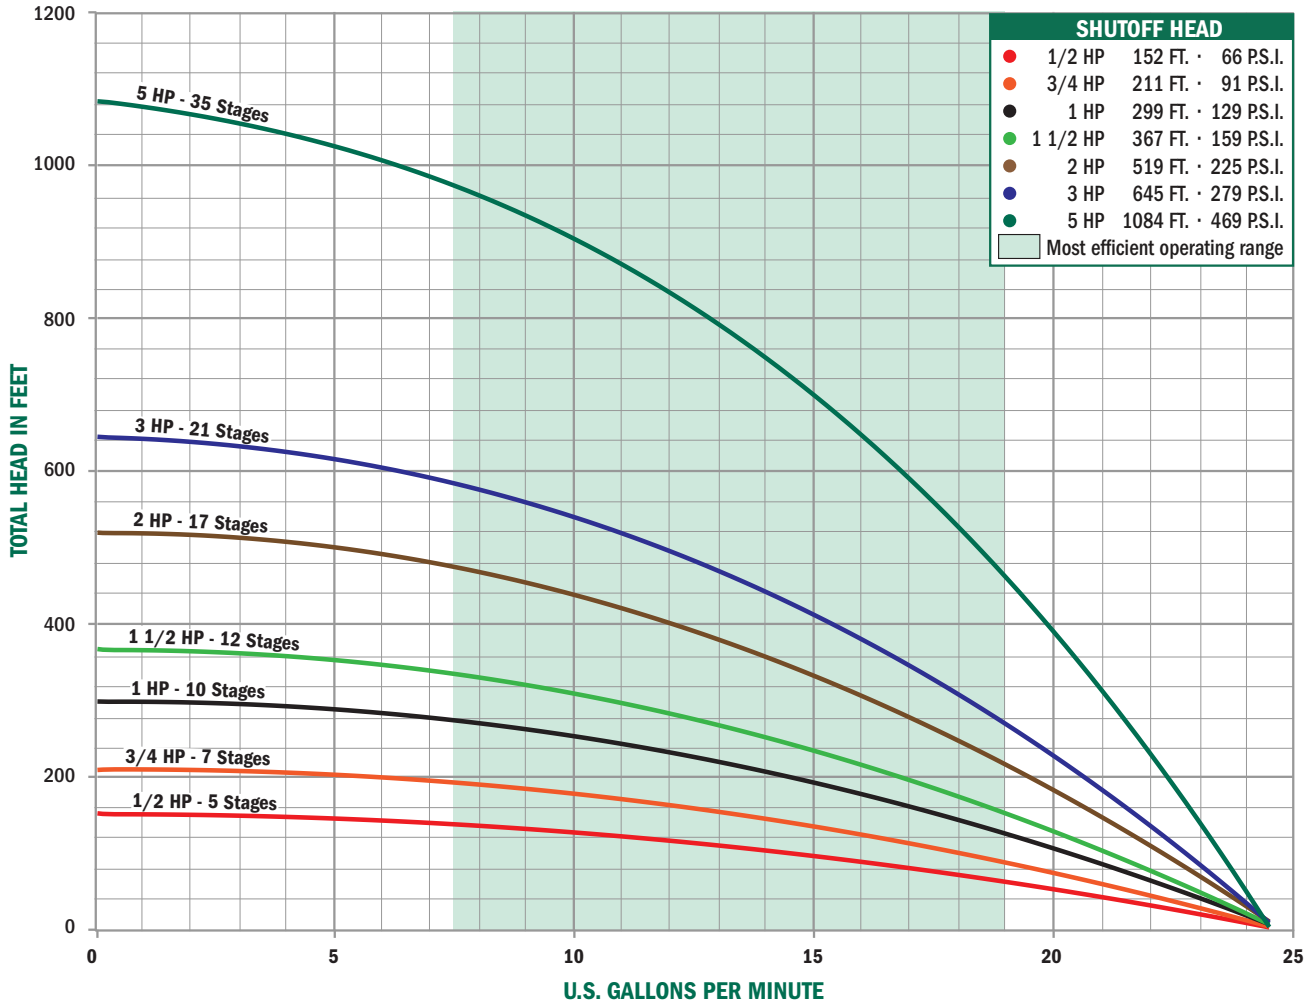

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
 4800 Chavenelle Rd
 Dubuque, IA 52002

Toll Free: 1-800-292-2737
 sales@aymcdonald.com
 aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by:

SUBMITTAL DATA SHEET

24000 Series 4" No-Lead Stainless Steel Submersible Pumps L - 15 GPM



Two Wire Single Phase

Part No.	Model No.	HP	Stages	Volt	A	B	Wt.
6630-312	24050L2A	1/2	5	115	9.3"	13.4"	23.5
6630-311	24050L2	1/2	5	230	9.3"	13.0"	23.5
6630-318	24075L2	3/4	7	230	10.7"	13.8"	27.2
6630-322	24100L2	1	10	230	12.8"	16.8"	31.1
6630-326	24150L2	1 1/2	12	230	14.1"	18.5"	38.7

Three Wire Three Phase

Part No.	Model No.	HP	Stages	Volt	A	B	Wt.
6630-411	24150L3Z	1 1/2	12	230	14.1"	13.6"	31.7
6630-332	24200L3Z	2	17	230	17.6"	15.4"	37.5
6630-337	24300L3Z	3	21	230	20.4"	19.8"	46.1
6630-342	24500L3Z	5	35	230	31.6"	24.2"	73.0

Three Wire** Single Phase


Part No.	Model No.	HP	Stages	Volt	A	B	Wt.
6630-314	24050L3A	1/2	5	115	9.3"	9.5"	24.5
6630-313	24050L3	1/2	5	230	9.3"	10.5"	24.5
6630-319	24075L3	3/4	7	230	10.7"	11.3"	27.2
6630-323	24100L3	1	10	230	12.8"	13.6"	31.1
6630-327	24150L3	1 1/2	12	230	14.1"	16.2"	35.7
6630-330	24200L3	2	17	230	17.6"	16.2"	42.5
6630-335	24300L3	3	21	230	20.4"	21.4"	52.1
6630-340	24500L3	5	35	230	31.6"	26.9"	88.0

4" Stainless Steel Pump Ends

Part No.	Model No.	HP	Wt.
6630-310	24050L	1/2	6
6630-317	24075L	3/4	7
6630-321	24100L	1	8
6630-325	24150L	1 1/2	9
6630-329	24200L	2	10
6630-334	24300L	3	12
6630-339	24500L	5	17

Pump end discharge
1 1/4" FNPT

3 3/4" diameter
with cable guard

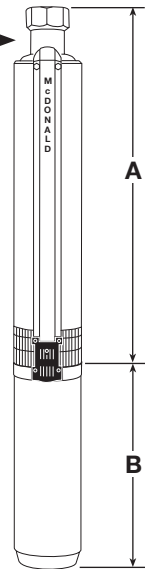

** All three wire pumps are available in three phase by selecting pump end and appropriate motor and starter kit.

Output - in Gallons Per Minute (Depth to Water)

1/2 HP	PSI	25'	50'	75'	100'	125'	150'
	0	22.7	20.4	17.8	14.6	10.6	3.1
	30	15.4	11.7	5.8	9.1	6.1	
	50	7.0	9.5	6.6			

3/4 HP	PSI	25'	50'	75'	100'	125'	150'	175'	200'
	0	23.3	21.7	20.0	18.1	16.0	13.6	10.5	6.0
	30	18.6	16.5	14.2	11.3	7.3			
	50	14.6	11.8	8.1					
60	12.0	8.4							

1 HP	PSI	25'	50'	75'	100'	125'	150'	175'	200'	225'	250'	275'
	0	23.8	22.7	21.6	20.4	19.1	17.7	16.2	14.5	12.6	10.4	7.4
	30	20.6	19.4	18.0	16.6	14.9	13.1	10.9	8.2	3.6		
	50	18.2	16.8	15.2	13.4	11.3	8.7	4.7				
60	16.9	15.3	13.5	11.5	8.9	5.1						

1 1/2 HP	PSI	25'	50'	75'	100'	125'	150'	175'	200'	225'	250'	275'	300'	325'	350'
	0	23.9	23.1	22.1	21.2	20.2	19.1	18.0	16.8	15.5	14.1	12.6	10.8	8.6	5.6
	30	21.4	20.4	19.4	18.3	17.1	15.8	14.5	12.9	11.2	9.1	6.4			
	50	19.5	18.4	17.3	16.0	14.7	13.2	11.5	9.5	6.9					
60	18.5	17.4	16.1	14.8	13.3	11.6	9.6	7.1							

2 HP	PSI	50'	100'	150'	200'	250'	300'	350'	400'	450'	500'
	0	23.6	22.3	21.0	19.5	17.9	16.2	14.3	12.1	9.3	5.1
	30	21.8	20.4	18.9	17.3	15.5	13.5	11.1	7.9		
	50	20.5	19.0	17.4	15.7	13.7	11.3	8.2			
60	19.8	18.3	16.6	14.8	12.6	10.0	6.3				

3 HP	PSI	50'	100'	150'	200'	250'	300'	350'	400'	450'	500'	550'	600'
	0	23.8	22.8	21.7	20.6	19.5	18.2	16.9	15.4	13.7	11.8	9.5	6.4
	30	22.4	21.3	20.2	19.0	17.7	16.3	14.8	13.0	11.0	8.4	4.7	
	50	21.4	20.3	19.1	17.8	16.4	14.9	13.2	11.1	8.6	5.0		
60	20.9	19.8	18.5	17.2	15.7	14.1	12.3	10.1	7.2	2.0			

5 HP	PSI	50'	100'	150'	200'	250'	300'	350'	400'	450'	500'	550'	600'	650'	700'	750'	800'	850'	900'	950'	1000'	
	0	24.0	23.5	23.0	22.4	21.8	21.2	20.5	19.9	19.2	18.4	17.6	16.8	15.9	15.0	14.0	12.8	11.5	10.1	8.4	6.3	
	30	23.3	22.7	22.2	21.6	20.9	20.3	19.6	18.9	18.1	17.3	16.5	15.6	14.6	13.5	12.3	11.0	9.5	7.7	5.3		
	50	22.8	22.2	21.6	21.0	20.3	19.7	18.9	18.2	17.4	16.6	15.6	14.7	13.6	12.4	11.1	9.6	7.8	5.5			
60	22.5	21.9	21.3	20.7	20.0	19.3	18.6	17.8	17.0	16.1	15.2	14.2	13.1	11.9	10.5	8.8	6.8					

FRICITION LOSSES IN RISER PIPE
HAVE NOT BEEN CALCULATED

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
4800 Chavenelle Rd
Dubuque, IA 52002

Toll Free: 1-800-292-2737
sales@aymcdonald.com
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: